

# NEXT

Thank you for shopping with us

# NEXT

## NAYA 11 LIGHT LED CHANDELIER

956379


### Assembly Instructions

#### Actual Product Size

Φ680\*H1130mm

max/min drop

1130/340mm

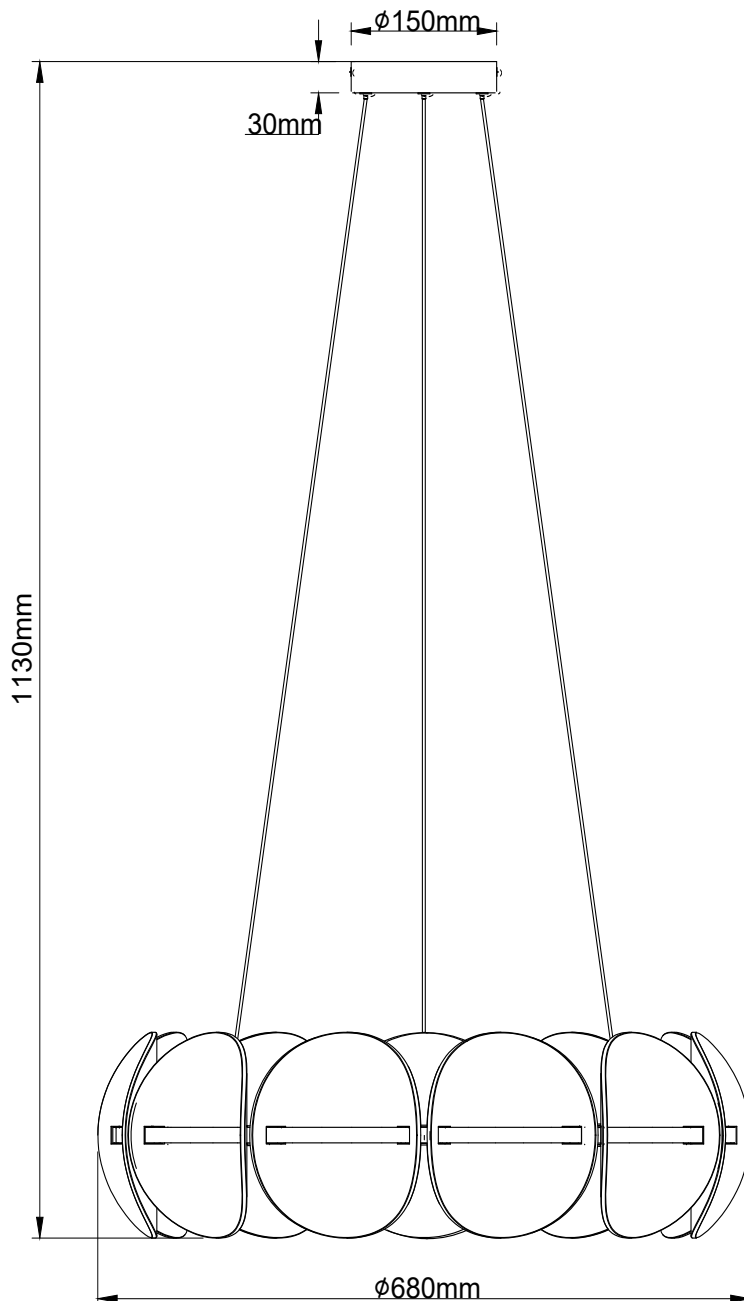

**IMPORTANT - RETAIN FOR FUTURE REFERENCE**

### Need Help?

with: Assembly instructions,  
missing or damaged parts

**CALL:0333 777 8999**

### BEFORE YOU START

#### Warnings

We suggest you retain these instructions for future reference

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or required by the law, consult a competent person who is registered with an electrician self-certification scheme. Further information is available online or from your Local Authority

This light is suitable for indoor use only

Light fittings should be connected to a 5 amp fused circuit

Before commencing installation, isolate the circuit to be used by removing the fuse or circuit breaker at the consumer distribution unit

**IMPORTANT:** The fixing point(s) and fixings must be capable of supporting the full weight of the light fitting.

The product must be securely fixed to the mounting surface using the screws supplied. The screws supplied are suitable for "masonry" only. Other fixings not supplied must be purchased.

#### Do's

We suggest you spend a short time reading through this leaflet before you start

When you are ready to start, make sure that you have the right tools and plenty of space

Unwrap all packaging materials and place the components on top of the carton box or on a clean floor to protect it from damage

We recommend that the packaging is used to protect the surfaces during assembly

Carefully check that you have all the parts before beginning assembly

Ensure the product is fully assembled as illustrated and all fixings fully tightened before use. Check fixings regularly to ensure they remain tight

Non replaceable 26W long life LED.

This product contains 3 light sources of energy efficiency class "G"

#### Don'ts


The fitting should not be fixed to newly painted or plastered surfaces as this may cause discolouration of the finish

We recommend cleaning with a soft dry cloth, do not use abrasive materials as these will rub away the protective coating.

#### Number of people required to assemble

One person who is competent with electrical wiring and installation, however we do recommend that this item is installed by a qualified electrician

#### Time to assemble



20mins

#### Tools required

Cross Head Screwdriver  
Flat Screwdriver  
Insulating Tape

#### Missing parts

If you are missing any fixtures and fittings for your product please contact our customer service team on 0333 777 8999 and they will be happy to help.

#### Cleaning Care

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will rub away the protective coating.

#### Maintenance

To ensure your safety, if the cable becomes damaged it must be replaced only by a qualified person.

#### Safety information

For your safety, please remember the following:


- Switch off and allow to cool for 10 minutes before cleaning.
- Clean only with a soft dry cloth.

#### You can write to us at

Home Customer Services  
Next Retail Ltd,  
Desford Road,  
Leicester,  
LE19 4AT  
or  
Next Retail (Ireland) Ltd,  
13-18 City Quay,  
Dublin 2,  
D02 ED70

**To view our full range please visit**  
**[www.next.co.uk](http://www.next.co.uk)**

## GETTING TO KNOW YOUR PRODUCT

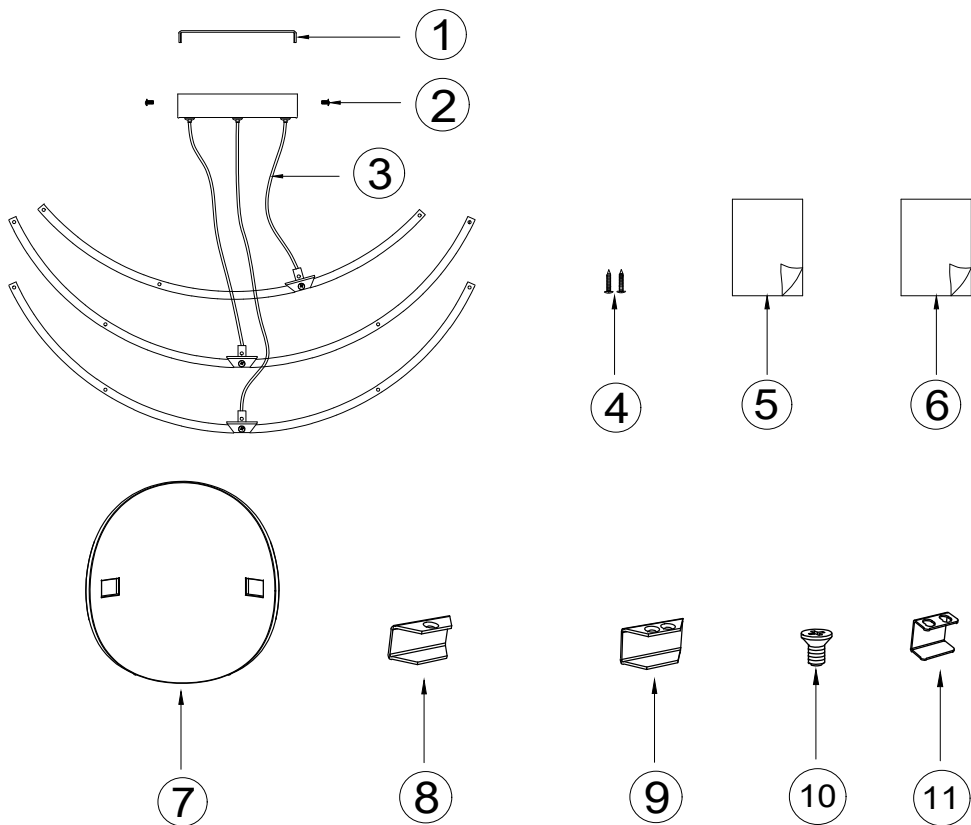

Ref	Description	Specification	Qty	Remark
1	Fixing bracket	L147*W20*H15MM	1	Attached on light fitting
2	Fixing bracket screws	M4*L10MM	2	Attached on light fitting
3	Light fitting		1	
4	Fixing screws	L38MM	2	Packed in fixing pack
5	Assembly instructions	A3 X 2	1	Packed in fixing pack
6	Re-package instructions	A4 X 1	1	Packed in fixing pack
7	Glass shades	L198*W184*H48MM	11	Packed in carton
8	Metal cap A	L38*W13.6*H19MM	5	Packed in fixing pack
9	Metal cap B	L38*W13.6*H21.6MM	3	Packed in fixing pack
10	Screws	M4*L6MM	13	Packed in fixing pack
11	Metal cap C	L20*W10.8*H17.6MM	3	Packed in fixing pack


# NEXT

## NAYA 11 LIGHT LED CHANDELIER

956379

### Assembly Instructions


1

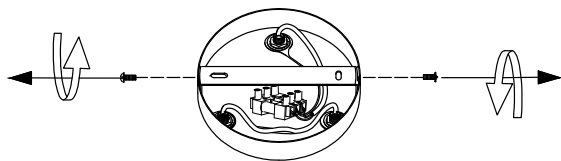

#### Step 1

Using the fixing bracket as a guide, mark screw positions on the ceiling. Make sure the area is free of any hidden wires, water or gas pipes.


2

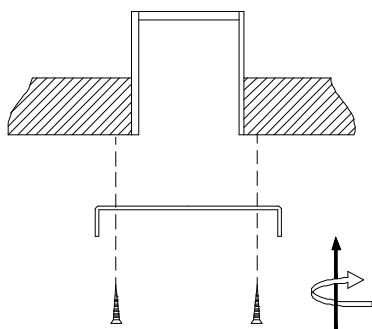

#### Step 2

Attach fixing bracket to the ceiling using screws supplied.


3

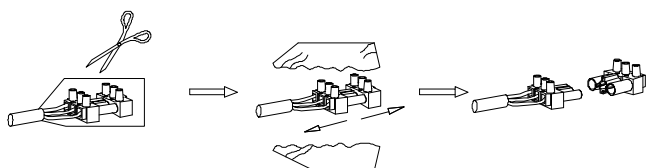

#### Step 3

When you are ready to connect your fitting to the electricity supply, carefully remove any clear plastic sleeve around the terminal block using a pair of scissors. Take care not to damage the wiring or terminal block while removing the sleeve. Then separate the female part from the male part and retain it for later use.


4

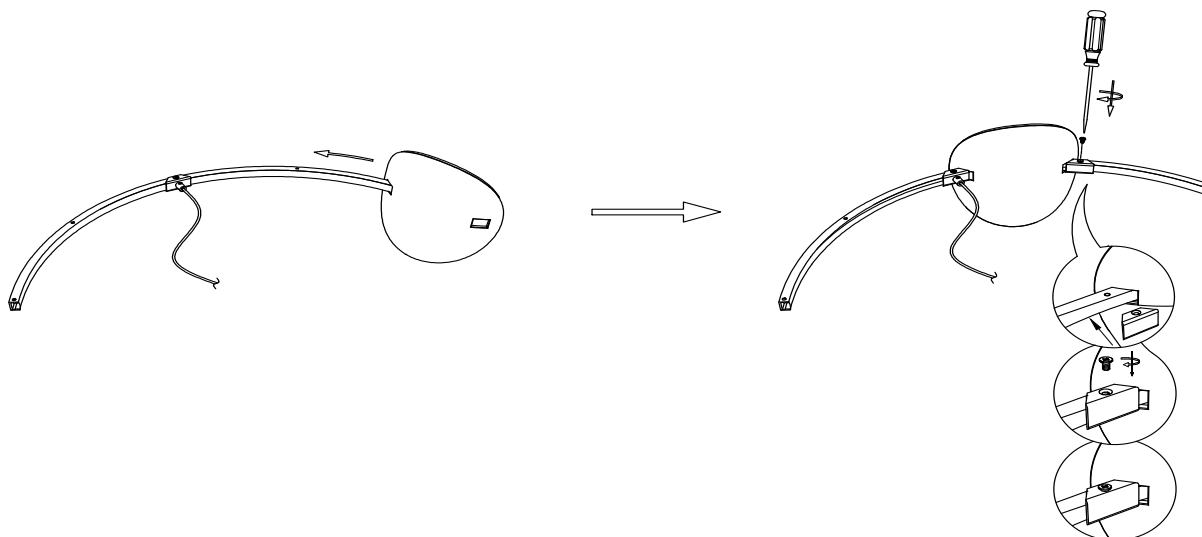

#### Step 4


Put the glass shade through the aluminum ring, attach on the metal cap A and secure into position with the screw supplied.

5

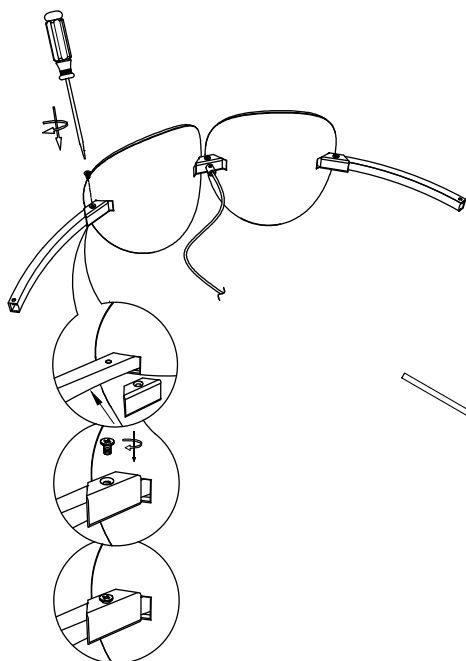


#### Step 5

Attach the other glass shade in the same way. Continue to fix the glass shades onto the rest of two aluminum rings.

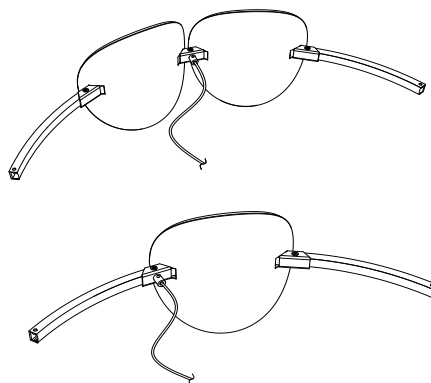

6

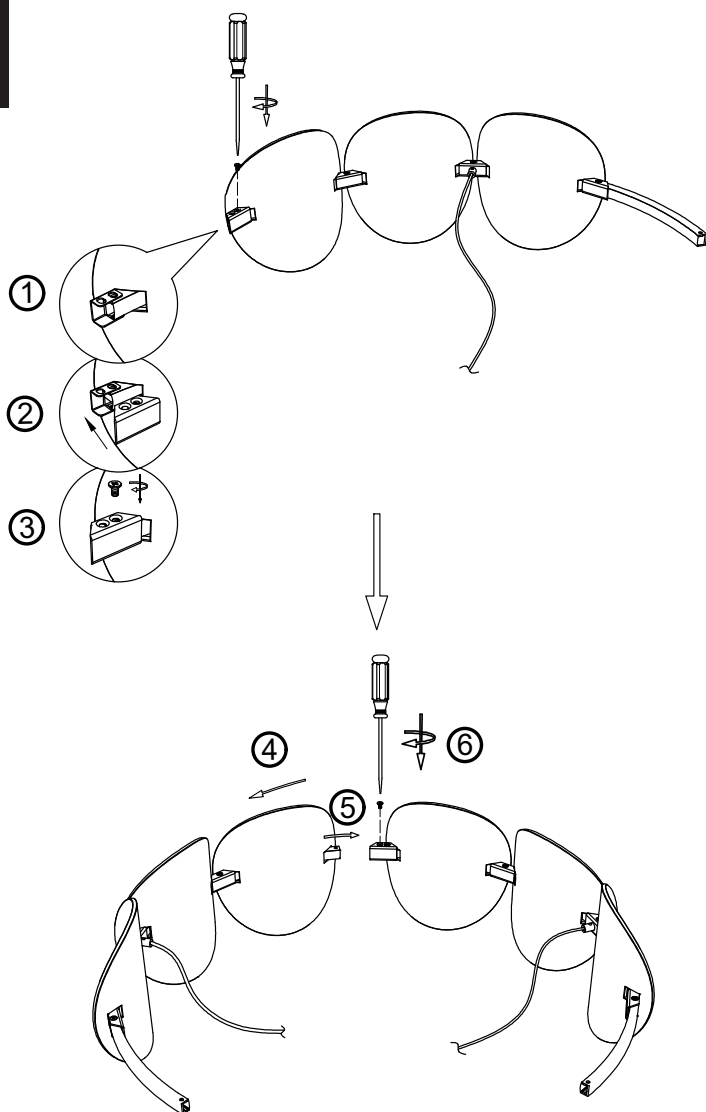

#### Step 6

Put the glass shade through the aluminum ring, attach on the metal cap C & B, align the holes and secure into position with one screw supplied first. Attach the glass shade through the other aluminum ring and insert the end of aluminum ring into the metal cap and fix the other screw.

# NEXT

## NAYA 11 LIGHT LED CHANDELIER


956379

### Assembly Instructions

7

#### Step 7


Continue to fix the rest of glass shades onto the aluminum rings and secure them together by using the metal cap C & B and screws supplied.

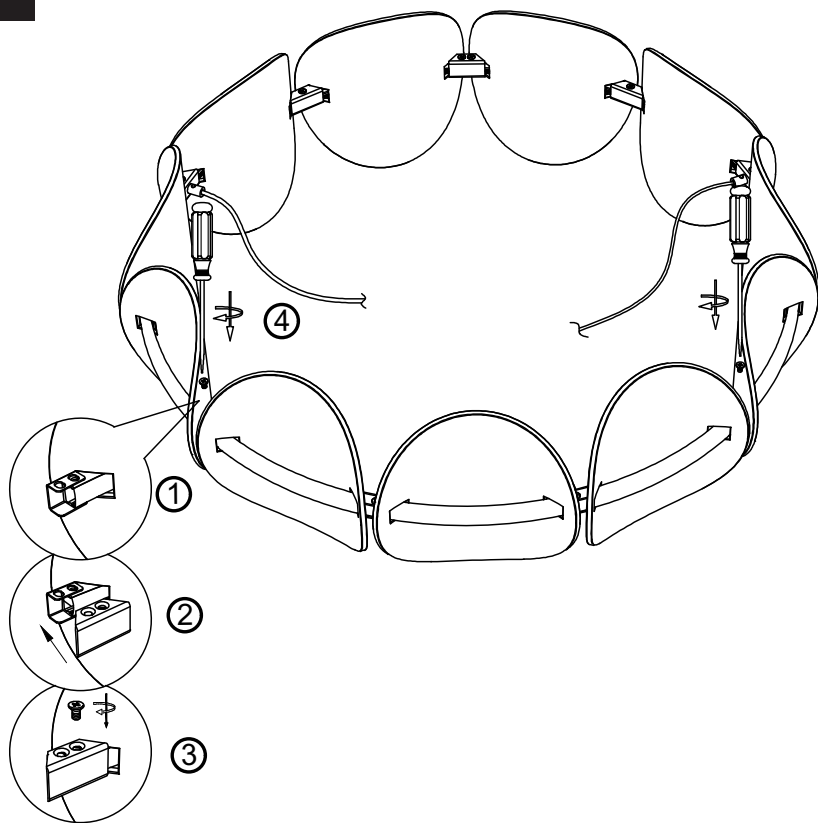


8

#### Step 8

To shorten the cable depress the wire surround and pull cable from the front of the fitting as shown. Move the cable S grip down to the cable so that it is flush inside the ceiling plate.

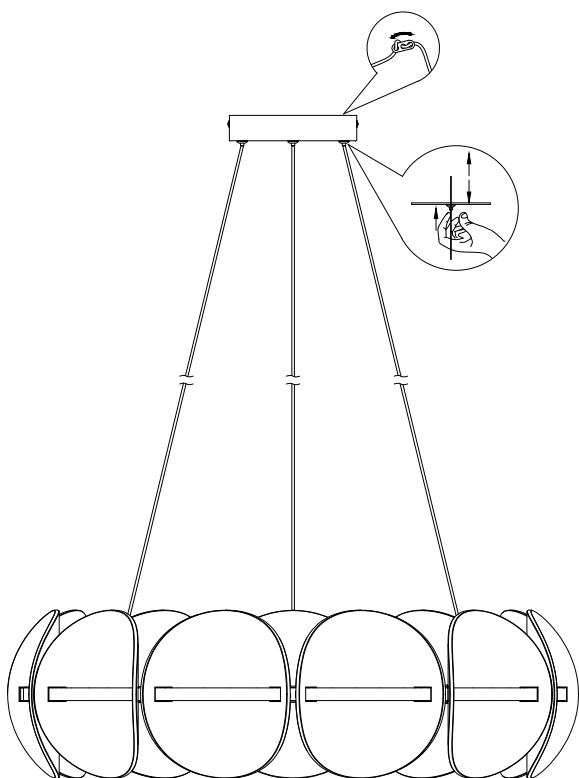


9

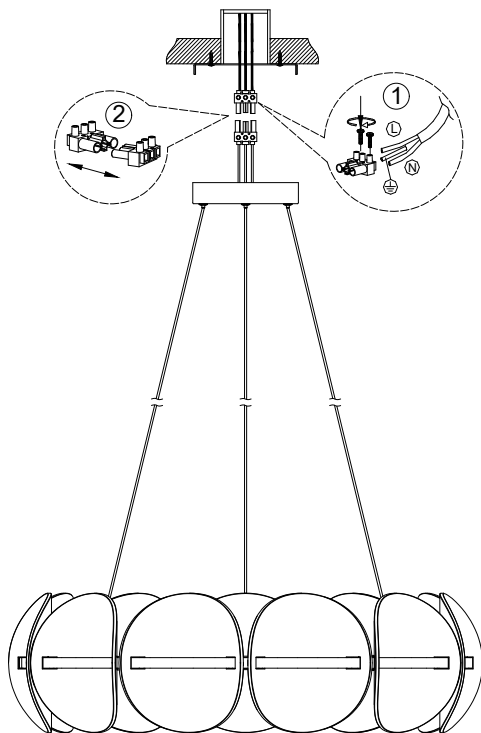


#### Step 9

First, connect the wires from building to the side of the terminal block shown in step 1. Ensure that the wires are correctly paired, following the diagram below, and ensure that connections are tight and that no loose strands are left out of the connectors.

Whilst supporting the weight of the light, firmly push the two parts of the terminal block together so that they are securely connected.

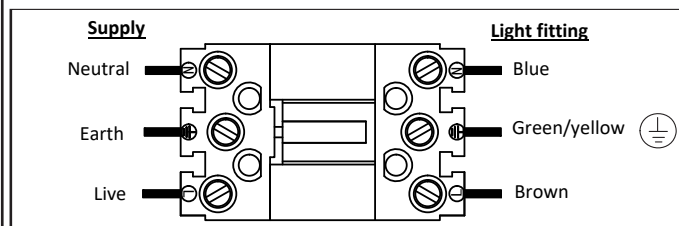

10

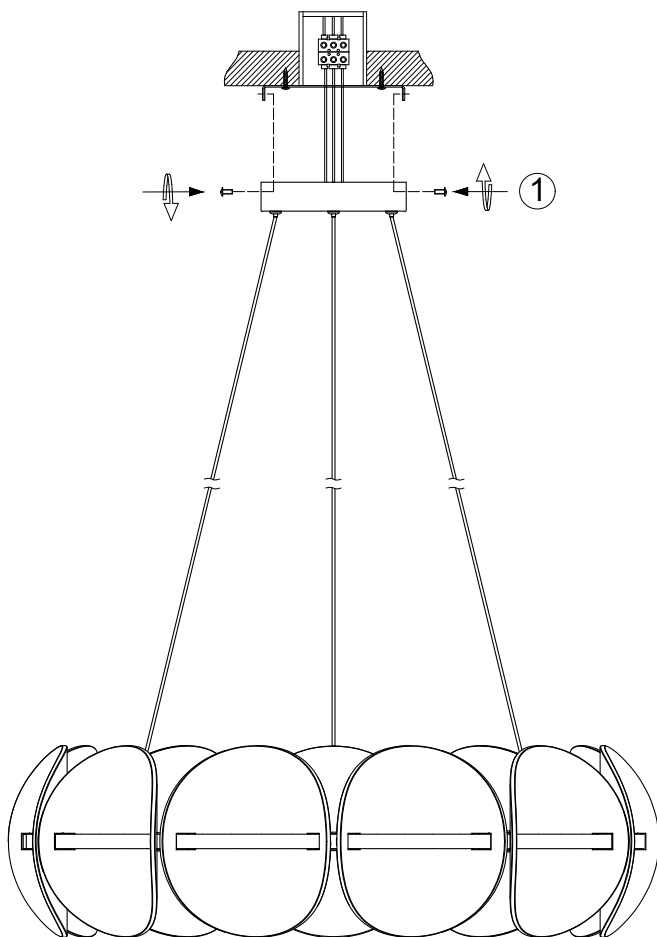

#### Step 10

Attach ceiling plate to the fixing bracket using fixing bracket screws.